




LG120 GEAR MOTOR FOR SEMPLETA

- ✓ Mainly for smaller greenhouses
- ✓ Can pull up to 50 m window of polycarbonate. If the window is made of glass, it can pull up to 40 m.
- ✓ Compact - low weight
- ✓ Multiple mounting solutions
- ✓ Silent operation and no maintenance

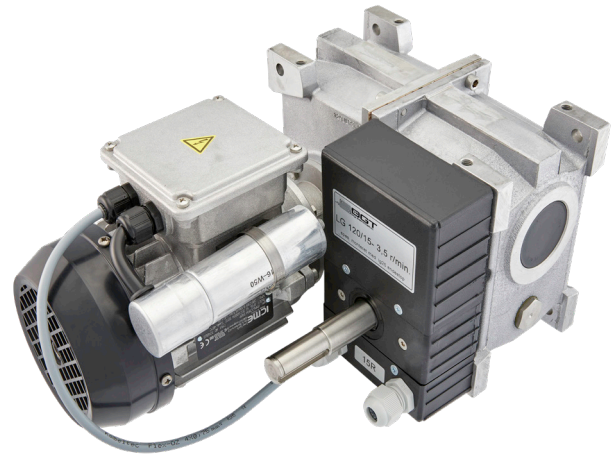

For operating vents and screens in smaller greenhouses

LG120 is a compact gear motor with high performance and small installation dimensions. The unique design with the electric motor parallel with the through going output shaft, combined with three mounting surfaces gives optimal mounting where space is limited.

Construction and choice of materials

- The design of the gearbox and the choice of materials give a silent operation.
- LG120 consists of a gearbox, electric motor and limit switch system.

Precision and safety

- LG120 has self-locking worm gearings securing vent or screen when power is cut off.
- All shafts are imbedded with ball bearings.
- The built-in limit switch has a gear connection directly to the output shaft, which provides both great precision and ensuring that the gear stops correctly.

Coupling possibilities

- The gear motor is mounted with an external output shaft, on which coupling adapters for two different couplings can be connected:
 - > Chain coupling
 - > Profile coupling
- Coupling adapters are easily attached to the gear motor output shaft with a groove and a locking ring. A very flexible solution.

Easy mounting

- The light alloy aluminium gearbox has a low weight, which makes installation handling easy.
- The closed gearbox and the many mounting surfaces give the possibility for horizontal, vertical or angled mounting, meaning you can mount directly on the greenhouse gutter or on a base plate.

Installation options and operation

- The gearbox can be supplied in an inverted model giving even more mounting possibilities, especially where they are mounted in pairs.
- The built-in limit switch in LG120 is easy to adjust and can be supplied to match the actual rotations needed for ventilation and screens respectively.
- The electric motor has a threaded hole for manual operation, giving the possibility to operate vents or screens before power is connected.
- It is possible to install a potentiometer for position feedback.

Long lifespan

- The selected materials and the ball bearings give the gear motor a lifetime which in many cases is as long as the greenhouse itself.
- The closed design makes the gear motor maintenancefree.



SPECIFICATIONS / LG120 GEAR MOTOR FOR SEMPLETA

Technical specifications

Item no.	120600	120610
Right / left gear	Right	Left
Torque output Nm	60	60
Output RPM	3,3	3,3
Max. no. of rotations between limit switches	15	15
Supply voltage / V	1 x 208-230	1 x 208-230
Frequency / Hz	50	50
Current / A	1,45-1,6	1,45-1,6
Power / kW	0,25	0,25
COS<p	0,97	0,97

Physical specifications

Environment temperature:	Max. operating temperature:	IP rating:	Emission:	Immunity:	Dimensions L x W x H:	Weight:
0 - 70° C (32 - 158° F)	100° C (212° F)	IP55F	EN50081-1	EN50082-1	386 x 224 x 165 mm (14,8 x 8,6 x 6,3")	13,5 kg (29,7 lb)

Accessories

	Item no.	Description	Order quantity per gear
	90140250	Console complete*	1
	140400	Profile coupling pieces	2
	90140620	Profile coupling 100 complete	2
	90140600	Profile coupling 250 complete	2


* Console is only to be ordered for new gears - when replacing a gear, console can be reused



SPECIFICATIONS / LG120 GEAR MOTOR FOR SEMPLETA


Left gear

Gear shaft is mounted on the left side of the unit, seen in proportion to the electrical motor. Left-gear is installed in the right side of the greenhouse (seen from the motor ventilation end).

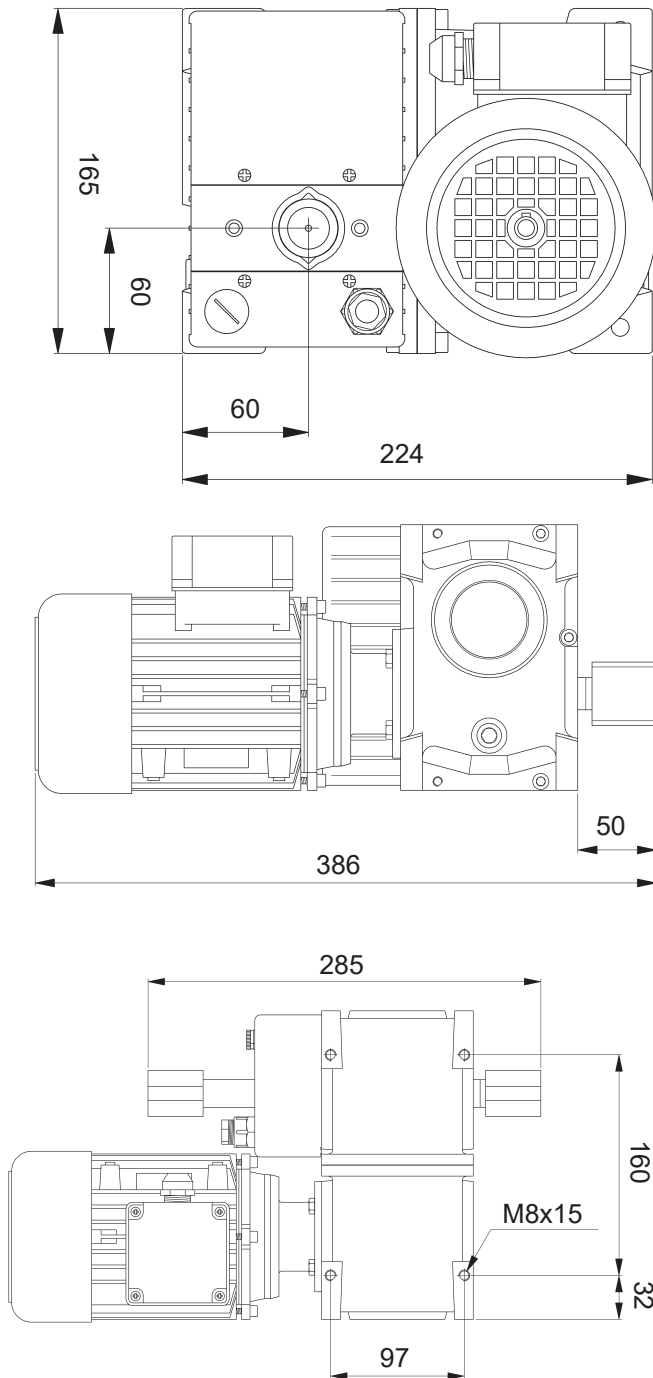

Right gear

Gear shaft is mounted on the right side of the unit, seen in proportion to the electrical motor. Right-gear is installed in the left side of the greenhouse (seen from the motor ventilation end).

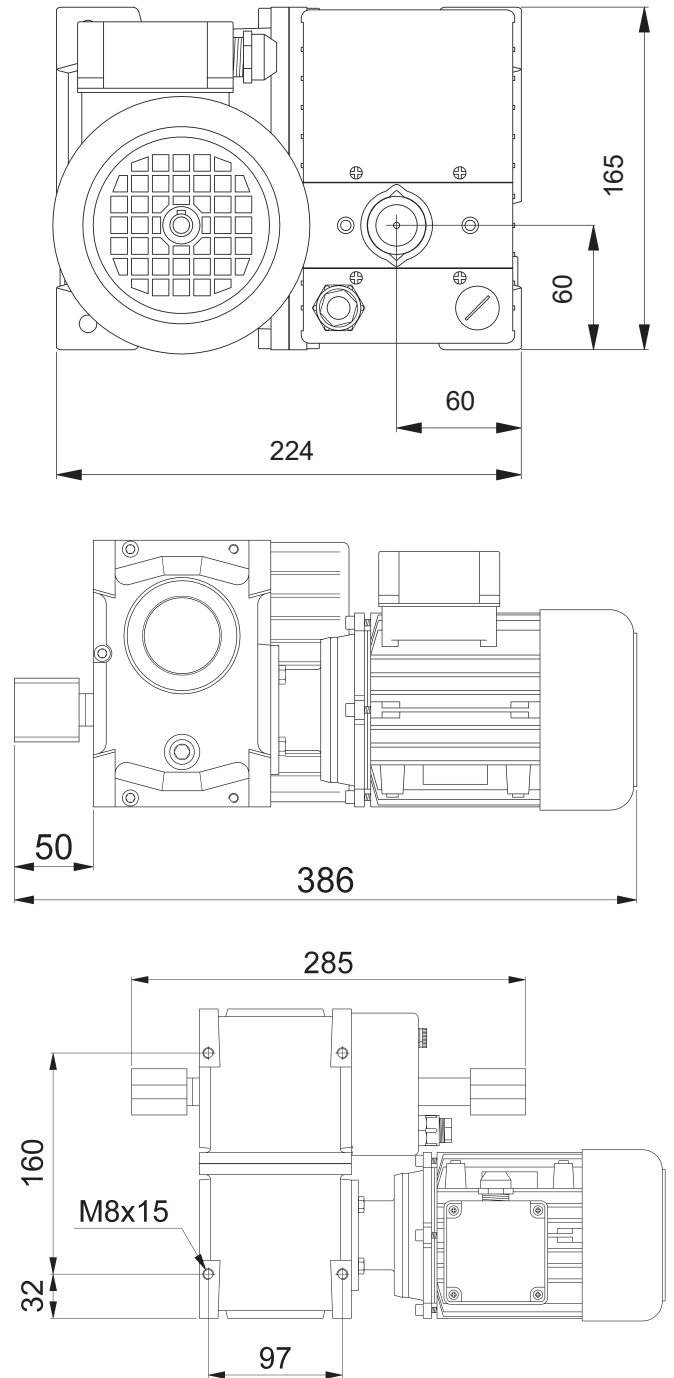

Distributor:

Contact details:

DGT by Senmatic
Phone: +45 64 89 22 11
dgtsales@senmatic.com - www.senmatic.dk

Head office:

Senmatic A/S - Industrivej 8 - DK-5471 Sønderlø